

PPPL-4043

PPPL-4043

**Three-dimensional Simulation  
of Backward Raman Amplification**

A.A Balakin, G.M. Fraiman, and N.J. Fisch

January 2005



# PPPL Report Disclaimers

## Full Legal Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

## Trademark Disclaimer

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

# PPPL Report Availability

This report is posted on the U.S. Department of Energy's Princeton Plasma Physics Laboratory Publications and Reports web site in Fiscal Year 2005. The home page for PPPL Reports and Publications is: [http://www.pppl.gov/pub\\_report/](http://www.pppl.gov/pub_report/)

## Office of Scientific and Technical Information (OSTI):

Available electronically at: <http://www.osti.gov/bridge>.

Available for a processing fee to U.S. Department of Energy and its contractors, in paper from:

U.S. Department of Energy  
Office of Scientific and Technical Information  
P.O. Box 62  
Oak Ridge, TN 37831-0062  
Telephone: (865) 576-8401  
Fax: (865) 576-5728  
E-mail: [reports@adonis.osti.gov](mailto:reports@adonis.osti.gov)

## National Technical Information Service (NTIS):

This report is available for sale to the general public from:

U.S. Department of Commerce  
National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161  
Telephone: (800) 553-6847  
Fax: (703) 605-6900  
Email: [orders@ntis.fedworld.gov](mailto:orders@ntis.fedworld.gov)  
Online ordering: <http://www.ntis.gov/ordering.htm>

# Three-dimensional simulation of Backward Raman Amplification

A.A. Balakin<sup>1</sup>, G.M. Fraiman<sup>1</sup> and N.J. Fisch<sup>2</sup>

<sup>1</sup> Institute of Applied Physics RAS, Nizhnii Novgorod, Russia 603950

<sup>2</sup> Princeton Plasma Physics Laboratory, Princeton, NJ USA 08543

**Abstract**—Three-dimensional (3-D) simulation for the Backward Raman Amplification (BRA) are presented. The images illustrate the effects of pump depletion, pulse diffraction, nonhomogeneous plasma density, and plasma ionization.

The amplification by resonant Raman backscattering in plasmas currently represents one of the most promising ways of generating ultra-intense short laser pulses. Compared to the conventional technique of chirped-pulse amplification, in principle unfocused output intensity can be  $10^4 - 10^5$  times higher [1]. In achieving these amplification effects, two optical systems may be utilized: one system for handling high power and fluence, and a second focusing system handling only low power [2].

In describing the propagation of both the laser pump and the counterpropagating low power seed pulse, it is important to take into account the 3-D effects of pulse diffraction, the non-coaxial pump and seed pulses, refraction on plasma inhomogeneity, and spreading due to ionization. These effects cannot be fully described using 2-D or axial symmetric approaches.

Here, we present the results of the numerical simulations of the seed pulse Raman amplification. The numerical scheme involves solving the three-dimensional equations describing the three-wave interaction process [1]. The plasma density is determined using a field ionization model, since the time of the impact ionization is small in comparison to the characteristic time of the BRA (several ps).

For these calculations, the pump wave amplitude is  $a_0 = 0.006$ , with Gaussian transverse profile with width 0.15 cm, and the frequency of the pump is  $\omega_0 = 2 \times 10^{15} \text{ sec}^{-1}$ . For these parameters, the linear e-folding length for the monochromatic pump backscattering instability is  $\gamma = a_0 \sqrt{\omega_0 \omega_p / 2}$ , or  $c/\gamma = 130 \mu\text{m}$ . We simulated a plasma length of 7 mm or  $55c/\gamma$ . The initial seed pulse had the same transverse Gaussian profile as the pump, but half the amplitude and a duration of 40 fs ( $12 \mu\text{m}$  in length).

The numerical simulation was performed using the hydrodynamic code “MBRS” [3]. The code is fully parallelized for using in computer cluster so that the calculation time of typical 3D variant with grid size  $128 \times 128 \times 2750$  points is about 32 hours on 15 processes AMD Athlon 1.7 GHz.

Figure 1 show the well-known  $\pi$ -pulse solution for wide pulses in homogeneous medium. The pulse diffraction is negligible for this case. The central surface is an isosurface of constant amplitude value, which is equal to half the maximum pulse amplitude. The figure also plots the the density, through a projection onto the corresponding edges. The modification

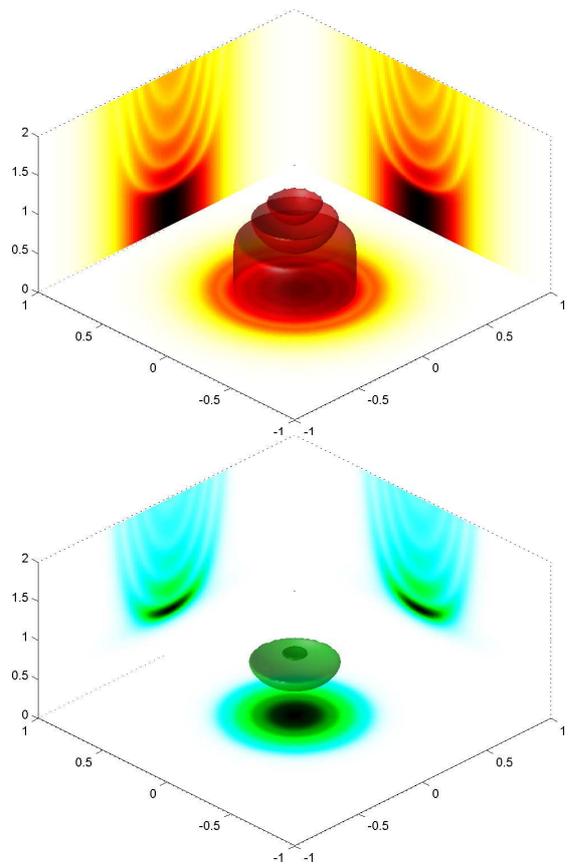


Fig. 1. The pump (upper) and seed (lower) profile for diffractionless case. Transverse coordinates are normalized to 30 cm; longitudinal coordinate is normalized to  $c/\gamma$ .

of the  $\pi$ -pulse solution in the presence of strong diffraction is shown on figure 2. The pulse width is  $150 \mu\text{m}$ . One can see the spreading of the pulses on the density plots and the modification of the longitudinal profile. The amplification in inhomogeneous plasma is shown in Figure 3. One can see the undulating amplitude profile of the seed pulse. Nevertheless the seed maintains good focusability, since the density perturbations are small (order of 1 %). Amplification in Helium plasma is shown in Figure 4. Note the formation of “medusa-like” structure of seed. This structure appears due to the breaking of the amplification and the limitation of seed amplitude growth [4]. Also the pump depletion in this regime is suppressed, showing a lengthy “tongue-like” pump profile. The transverse spikes are formed due to creation of lengthy

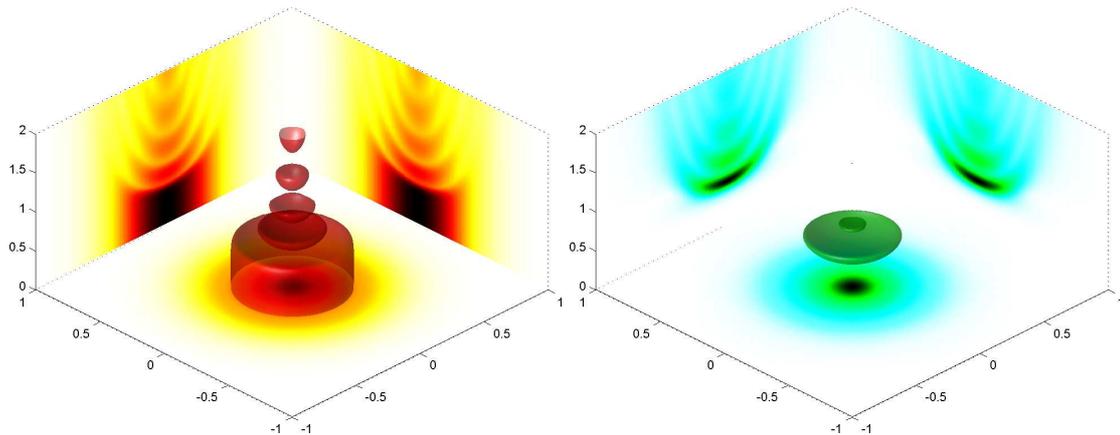


Fig. 2. The pump (left) and seed (right) profile for case of narrow pump. Transverse coordinates are normalized to 0.3 cm; longitudinal coordinate is normalized to  $c/\gamma$ .

strip of newly ionized plasma.

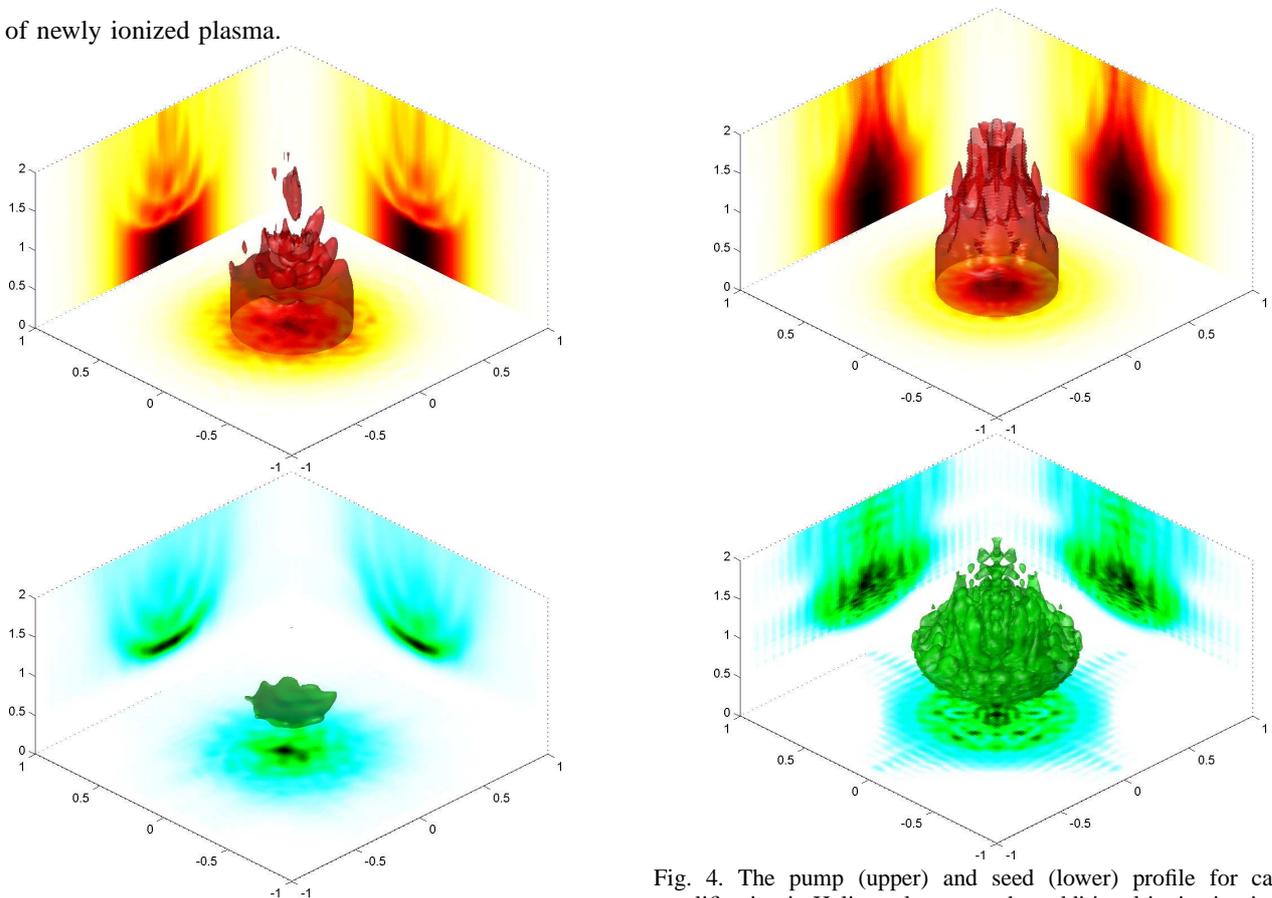


Fig. 3. The pump (upper) and seed (lower) profile for case of propagation in inhomogeneous plasma. Transverse coordinates are normalized to 0.3 cm; longitudinal coordinate is normalized to  $c/\gamma$ .

The work was supported by RFBR grants No 02-02-17275, 02-02-17277, US DOE under contract DE-AC02-76 CHO3073 and the US DARPA.

Fig. 4. The pump (upper) and seed (lower) profile for case of amplification in Helium plasma, so that additional ionization is available. Transverse coordinates are normalized to 0.3 cm; longitudinal coordinate is normalized to  $c/\gamma$ .

#### REFERENCES

- [1] V. M. Malkin, G. Shvets, and N. J. Fisch, *Phys. Plasmas*, **7**, 2232 (2000); V. M. Malkin, G. Shvets, and N. J. Fisch, *Phys. Rev. Lett.* **82**, 4448 (1999).
- [2] N. J. Fisch and V. M. Malkin, *Physics of Plasma* **9**, 2056 (2003).
- [3] A. A. Balakin, G. M. Fraiman, N. J. Fisch and V. M. Malkin, *Physics of Plasma* **10**, 4856 (2003).
- [4] A.A. Balakin et al., *Backward Raman Amplification in a Partially Ionized Gas*, in preparation.

## External Distribution

Plasma Research Laboratory, Australian National University, Australia  
Professor I.R. Jones, Flinders University, Australia  
Professor João Canalle, Instituto de Fisica DEQ/IF - UERJ, Brazil  
Mr. Gerson O. Ludwig, Instituto Nacional de Pesquisas, Brazil  
Dr. P.H. Sakanaka, Instituto Fisica, Brazil  
The Librarian, Culham Laboratory, England  
Mrs. S.A. Hutchinson, JET Library, England  
Professor M.N. Bussac, Ecole Polytechnique, France  
Librarian, Max-Planck-Institut für Plasmaphysik, Germany  
Jolan Moldvai, Reports Library, Hungarian Academy of Sciences, Central Research Institute  
for Physics, Hungary  
Dr. P. Kaw, Institute for Plasma Research, India  
Ms. P.J. Pathak, Librarian, Institute for Plasma Research, India  
Ms. Clelia De Palo, Associazione EURATOM-ENEA, Italy  
Dr. G. Grosso, Instituto di Fisica del Plasma, Italy  
Librarian, Naka Fusion Research Establishment, JAERI, Japan  
Library, Laboratory for Complex Energy Processes, Institute for Advanced Study,  
Kyoto University, Japan  
Research Information Center, National Institute for Fusion Science, Japan  
Dr. O. Mitarai, Kyushu Tokai University, Japan  
Dr. Jiengang Li, Institute of Plasma Physics, Chinese Academy of Sciences,  
People's Republic of China  
Professor Yuping Huo, School of Physical Science and Technology, People's Republic of China  
Library, Academia Sinica, Institute of Plasma Physics, People's Republic of China  
Librarian, Institute of Physics, Chinese Academy of Sciences, People's Republic of China  
Dr. S. Mirnov, TRINITI, Troitsk, Russian Federation, Russia  
Dr. V.S. Strelkov, Kurchatov Institute, Russian Federation, Russia  
Professor Peter Lukac, Katedra Fyziky Plazmy MFF UK, Mlynska dolina F-2,  
Komenskeho Univerzita, SK-842 15 Bratislava, Slovakia  
Dr. G.S. Lee, Korea Basic Science Institute, South Korea  
Institute for Plasma Research, University of Maryland, USA  
Librarian, Fusion Energy Division, Oak Ridge National Laboratory, USA  
Librarian, Institute of Fusion Studies, University of Texas, USA  
Librarian, Magnetic Fusion Program, Lawrence Livermore National Laboratory, USA  
Library, General Atomics, USA  
Plasma Physics Group, Fusion Energy Research Program, University of California  
at San Diego, USA  
Plasma Physics Library, Columbia University, USA  
Alkesh Punjabi, Center for Fusion Research and Training, Hampton University, USA  
Dr. W.M. Stacey, Fusion Research Center, Georgia Institute of Technology, USA  
Dr. John Willis, U.S. Department of Energy, Office of Fusion Energy Sciences, USA  
Mr. Paul H. Wright, Indianapolis, Indiana, USA

The Princeton Plasma Physics Laboratory is operated  
by Princeton University under contract  
with the U.S. Department of Energy.

Information Services  
Princeton Plasma Physics Laboratory  
P.O. Box 451  
Princeton, NJ 08543

Phone: 609-243-2750  
Fax: 609-243-2751  
e-mail: [pppl\\_info@pppl.gov](mailto:pppl_info@pppl.gov)  
Internet Address: <http://www.pppl.gov>